

Development of Mechanistic Models

Mechanistic Model for Ringkøbing Fjord

Technical documentation on biogeochemical model



Development of Mechanistic Models

Mechanistic Model for Ringkøbing Fjord

Technical documentation on biogeochemical model

Prepared for Danish EPA (Miljøstyrelsen, Fyn)
Represented by Mr Harley Bundgaard Madsen, Head of Section



Eelgrass in Kertinge Nor
Photo: Peter Bondo Christensen

Project manager	Anders Chr. Erichsen & Mads Birkeland
Quality supervisor	Ian Sehested Hansen
Project number	11822245
Approval date	9. September 2020
Classification	Open

CONTENTS

1	Executive Summary	1
2	Introduction	3
3	Modelling Concept	4
3.1	Mechanistic Modelling.....	4
3.2	Model Development	4
3.3	Modelling System.....	5
4	Model Set-up.....	6
4.1	Model Domain	7
4.2	Open Boundary Conditions	8
4.3	Forcings	8
4.4	Sources	8
4.5	Initial Conditions.....	9
5	Model Calibration and Validation	10
5.1	Model Calibration Procedure	10
5.2	Presentation of Key Model Results.....	10
5.3	Model Performance.....	14
5.3.1	Calibration/Validation at Station RKB1	15
5.3.2	General Calibration/Validation	19
6	Conclusion.....	22
7	References.....	23

FIGURES

Figure 4-1	Model bathymetry of the Ringkøbing Fjord model. Water depths refer to MSL. The model has no open boundary. The sluice at Hvide Sande is implemented as a source/sink.	6
Figure 4-2	Resolution of the horizontal model mesh of the Ringkøbing Fjord model.	7
Figure 4-3	Location of sources in the Ringkøbing Fjord model. The sources positions represent the main rivers, but loadings are scaled to include all local run-off and point sources from land to the fjord.	9
Figure 5-1	Modelled yearly average bottom water concentrations of dissolved oxygen (DO, mg/l) for 2016.	11
Figure 5-2	Modelled yearly average surface water concentrations of chlorophyll-a (CH, mg/l) for 2016.	12
Figure 5-3	Modelled yearly average surface water concentrations of total nitrogen (TN, mg/l) for 2016.	13
Figure 5-4	Modelled yearly average surface water concentrations of total phosphorus (TP, mg/l) for 2016.	14
Figure 5-5	Location of station RKB1 and RKB10 used for performance measures in Ringkøbing Fjord.	15
Figure 5-6	Comparison of measured and modelled concentrations of dissolved oxygen (DO, mg/l) at station RKB1 in the surface and bottom (3 m) waters. Dots represent measurements, and the solid line shows modelled data for the entire period.	16

Figure 5-7	Comparison of measured and modelled concentrations of chlorophyll-a (CH, µg/l) at station RKB1 in surface and bottom (3 m) waters. Dots represent measurements, and solid lines show modelled data for the entire period.....	16
Figure 5-8	Comparison of measured and modelled light attenuation coefficient (K_d , m^{-1}) at station RKB1 in the surface waters. Dots represent measurements, and the solid line shows modelled data for the entire period.	17
Figure 5-9	Measured and modelled concentrations of dissolved inorganic nitrogen (DIN, mg/l) at station RKB1 in the surface and bottom (3 m) waters. Dots represent measurements, and solid lines show modelled data for the entire period.....	17
Figure 5-10	Measured and modelled concentrations of dissolved inorganic phosphorus (DIP, mg/l) at station RKB10 in the surface and bottom (3 m) waters. Dots represent measurements, and solid lines show modelled data for the entire period.	18
Figure 5-11	Comparison of measured and modelled concentrations of total nitrogen (TN, mg/l) at station RKB1 in surface and bottom (3 m) waters. Scatter data represent measurements, and solid lines show modelled data for the entire period.	18
Figure 5-12	Comparison of measured and modelled concentrations of total P (TP, mg/l) at station RKB1 in surface and bottom (3 m) waters. Scatter data represent measurements, and solid lines show modelled data for the entire period.....	19
Figure 5-15	Bar chart illustrating all model performances evaluated against five different quality measures and all parameters. The vertical line indicates the aim of 75% being 'excellent', 'very good' or 'good'.....	19

TABLES

Table 2-1	Waterbodies included in the Ringkøbing Fjord model.	3
Table 5-1	Review of model performance at station RKB1 based on measured and modelled data for the validation period 2002-2016. Blue colour indicates an 'excellent' model; dark green indicates a 'very good' model; light green indicates a 'good' model, and yellow indicates a 'poor' model.	20
Table 5-2	Review of model performance at station RKB10 based on measured and modelled data for the validation period 2002-2016. Blue colour indicates an 'excellent' model; dark green indicates a 'very good' model; light green indicates a 'good' model, and yellow indicates a 'poor' model.	21

1 Executive Summary

The model development presented in this technical note represents the biogeochemical model development for Ringkøbing Fjord. The Ringkøbing Fjord model is part of a large model complex comprising several mechanistic models developed by DHI and a number of statistical models developed by Aarhus University (AU), Bioscience.

The model complex is developed with the overall aim to support the Water Framework Directive (WFD) by introducing mechanistic models in as many Danish water bodies as possible and integrating with Bayesian statistical modelling, and cross-system modelling carried out by AU, Bioscience.

Here we present the overall biogeochemical model set-up covering Ringkøbing Fjord, together with a quality assessment of the model performance. This specific model includes one Danish water body:

Water body ^{*)}	Number
Ringkøbing Fjord	132

^{*)} Water bodies defined for the River Basin Management Plans 2015-2021


The Ringkøbing Fjord biogeochemical model builds on the developed hydrodynamic model of Ringkøbing Fjord and is developed to describe the biogeochemistry within the model domain focusing on parameters relevant for WFD, including dynamics in nutrients, phytoplankton, primary production, dissolved oxygen, organic matter and benthic vegetation.

The model quality is evaluated from three model performance measures: Percent Bias (P-Bias), Spearman Rank Correlation and Cost Function (CF). According to DHI (2019b), Model Efficiency Factor (MEF) was suggested initially, but during the model development, it was concluded that MEF was not suitable for evaluating this kind of estuarine biogeochemical models, why Cost Function (CF) was introduced. The quality measure CF was used in Erichsen and Timmermann (2017) as part of an international evaluation (Hermann *et al.* 2017). As described in DHI (2019b), the MEF evaluates the Root Mean Square Error (RMSE) to the standard deviation (based on measurements). As model results are compared against measurements at the exact point in time in dynamic estuarine systems with strong gradients, the MEF has proven not to be suited (due to its dependency on entirely right timing). The CF assesses the fit/misfit between measurements and observations as also normalized to the standard deviation (based on measurements) why it is decided to use this measure in the overall assessment of model performance.

Concerning the performance measures, our ambition is to have 75% of all measures (Percent Bias, Spearman Rank Correlation and Cost Function) to meet 'excellent', 'very good', or 'good' for all parameters and stations (lumped).

As can be seen from the present technical note, 79% of all annual data sets meet the success criteria when evaluated against the three performance measures, and 76% when assessing both annual performance and summer/winter performance of all data. The average model performance for the biogeochemical model of Ringkøbing Fjord is summarized below:

- Model performance measures for dissolved oxygen (DO) are on average 2.9% (P-Bias), 0.9 (Spearman Rank Correlation) and 0.4 (CF). The average model performance for DO is categorized to be 'excellent' (P-Bias) and 'very good' (Spearman Rank Correlation and CF).

- Model performance measures for chlorophyll-a (CH) are on average 26.8% (P-Bias), 0 (Spearman Rank Correlation) and 1.2 (CF). The average model performance for CH is categorized to be 'good' (P-Bias and CF) and 'poor' (Spearman Rank Correlation).
- Model performance measures for all light attenuation coefficient (K_d) are on average 40.0% (P-Bias), 0.4 (Spearman Rank Correlation) and 0.6 (CF). The average model performance for K_d is categorized to be 'very good' (CF) and 'good' (P-Bias and Spearman Rank Correlation). 
- Model performance measures for dissolved inorganic nitrogen (DIN) are on average 41.6% (P-Bias), 0.8 (Spearman Rank Correlation) and 0.8 (CF). The average model performance for DIN is categorized to be 'very good' (Spearman Rank Correlation and CF) and 'poor' (P-Bias).
- Model performance measures for dissolved inorganic phosphorous (DIP) are on average 43.1% (P-Bias), 0.3 (Spearman Rank Correlation) and 1.4 (CF). From the quality measure, the model performance for DIP is categorized to be 'good' (Spearman Rank Correlation and CF) and 'poor' (P-Bias).
- Model performance measures for total nitrogen (TN) are on average 40.6% (P-Bias), 0.9 (Spearman Rank Correlation) and 0.7 (CF). The average model performance for TN is categorized to be 'very good' (Spearman Rank Correlation and CF) and 'poor' (P-Bias).
- Model performance measures for total phosphorus (TP) are on average 21.1% (P-Bias), 0.5 (Spearman Rank Correlation) and 0.7 (CF). The average model performance for TP is categorized to be 'very good' (CF) and 'good' (P-Bias and Spearman Rank Correlation).

The details behind the above performance are available in Table 5-1 and Table 5-2. Time-series comparisons are available here: rbmp2021-2027.dhigroup.com (Google Chrome only).

The ambition of meeting 'excellent', 'very good', or 'good' for 75% of all parameters and stations (lumped) has been well reached. Hence, in this technical note, we conclude that the Ringkøbing Fjord biogeochemical model has been developed successfully for Danish waterbodies and will be applied for modelling nutrient scenarios in these waterbodies in the assessment of maximum allowable inputs (MAI).

2 Introduction

The model development presented in this technical note represents the biogeochemical model development for Ringkøbing Fjord and builds on top of the Ringkøbing Fjord hydrodynamic model (DHI 2019d). Documentation on the model application will be presented in the following reports. The biogeochemical model is part of the mechanistic model complex development, which includes two regional models, three local-domain models, and six estuary specific models. The model complex is developed with the overall aim to support the Water Framework Directive (WFD) by introducing mechanistic models in as many Danish water bodies as possible and integrating with Bayesian statistical modelling, and cross-system modelling carried out by AU, Bioscience.

Here we present the overall biogeochemical model set-up covering Ringkøbing Fjord, together with a quality assessment of the model performance. The Ringkøbing Fjord model includes one Danish water body listed in Table 2-1 below. The location of the Danish waterbodies is documented in Erichsen *et al.* (2019).

Table 2-1 Waterbodies included in the Ringkøbing Fjord model.

Water body ^{*)}	Number
Ringkøbing Fjord	132

^{*)} Waterbodies defined for the River Basin Management Plans 2015-2021

The biogeochemical model computes the development during the modelling period in concentrations of ecological parameters, including nutrients, dissolved oxygen, Secchi depth, and organic matter, due to, e.g. primary production. The results represent short term changes due to specific weather events, seasonal variations and interannual trends. This project will focus on summer chlorophyll-a and parameters influencing distribution and growth of eelgrass. A detailed description of the specific state variables included in the Ringkøbing Fjord biogeochemical model can be found in DHI (2019c).

According to DHI (2019b), the quality measure Model Efficiency Factor (MEF) was suggested as a quality measure initially, but during the biogeochemical model development, it was concluded that MEF is not suitable to evaluate this kind of estuarine biogeochemical models. As described in DHI (2019b), the MEF evaluates the RMSE to the standard deviation (based on measurements). As we compare model results to the measurements at the exact point in time in a number of estuary system with strong gradients and variable dynamics, the MEF has proven not to be suited (due to its dependency on entirely right timing). For the validation of the biogeochemical models, we have included the quality measure Cost Function (CF) in replacement of MEF. The CF measure was also used in Erichsen & Timmermann (2017) and describes how the difference between measured and modelled values is related to the inherent variation in field observations.

3 Modelling Concept

3.1 Mechanistic Modelling

The present technical note represents the biogeochemical part of the model complex covering Ringkøbing Fjord. The Ringkøbing Fjord model is one model out of eleven mechanistic models developed to increase the knowledge of pressures and status in Danish marine waters and to provide tools for the Danish EPA as part of the implementation of the WFD. Mechanistic models enable dynamic descriptions of ecosystems and interactions between natural forcing and anthropogenic pressures. Hence, mechanistic models can be applied for predictions of changes in specific components, like chlorophyll-a concentrations, due to changes in, e.g. anthropogenic pressures.

The Ringkøbing Fjord model is defined as an estuary specific model. The mechanistic model complex development as part of the present projects includes two regional models, three local-domain models, and six estuary specific models:

- The regional models cover both specific Danish waterbodies and regional waters, such as the North Sea and a small part of the North Atlantic, which are included in the North Sea-model, and the Baltic Sea, which is covered by the IDW-model (Inner Danish Waters). These models provide model results for specific water bodies but, equally important, give boundaries to local-domain models and estuary specific models.
- Local-domain models are developed to allow for resolving most small and medium-sized water bodies in the north-western Belt Sea, the south-western Belt Sea and the water bodies in and around Smålandsfarvandet.
- Estuary specific models: Six specific estuary (fjord) models are developed to allow for detailed modelling of specific estuaries.

The ecological conditions in marine waters are determined by several different natural factors like water exchange, stratification, water temperature, nutrient availability, sediment characteristics, the structure of the food web etc. On top of that, several anthropogenic factors like nutrient loadings, fishery, etc., also impact the ecosystem and potentially the ecological status.

The model developed in this specific project aims at supporting the Danish EPA's implementation of the WFD. During this project, the models are developed to represent the present period (2002-2016) evaluated against NOVANA measurements. Here we use current data on solar radiation, current nutrient loadings, etc.

After the models are developed, they will be applied for scenario modelling with changed nutrient loading to assess the Maximum Allowable nutrient Inputs (MAIs).

3.2 Model Development

The model development consists of a 3D hydrodynamic model describing the physical system (water levels, current, salinity and water temperatures), and a 3D biogeochemical (ecosystem) model describing the governing biogeochemical pelagic and benthic parameters and processes like phytoplankton, dissolved oxygen, primary production, etc. The model structure is modular, meaning that a hydrodynamic model is developed independently of the biogeochemical model (for further information about the hydrodynamic model see DHI (2019a)). A more detailed

description of the biogeochemical model is available in DHI (2019c), and the underlying Ringkøbing Fjord hydrodynamic model is described in DHI (2019d).

All mechanistic models have been set up and calibrated/validated for the period 2002-2016 and reported according to the performance measures P-Bias, Spearman Rank Correlation and CF (DHI 2019b). Results from the entire modelling period are furthermore presented as time series in a WEB-tool (rbmp2021-2027.dhigroup.com, Google Chrome only) with a few examples included in section 5.3. Most data used for calibration and validation originate from the national monitoring programme NOVANA (see <http://odaforalle.au.dk> for more details). For some models and some parameters, other data are included, and the specific origin of those data will be referenced when used.

3.3 Modelling System

The biogeochemical model is based on the 3D modelling software MIKE 3 HD FM (version 2017) developed by DHI together with the numerical 3D equation solver MIKE ECO Lab to describe the relevant biogeochemical processes in the modelling system. The MIKE 3 FM modelling system is based on a flexible mesh approach with horizontal mesh elements of varying sizes within the modelling domain. The water column is resolved by multiple layers. The modelling system has been developed for applications within oceanographic, coastal, and estuarine environments.

The scientific documentation of MIKE 3 HD FM is given in DHI (2019a).

The main components and processes determining the status of the water quality and the response in the ecosystem (e.g. changes in eelgrass biomass) are included in the biogeochemical model. They are based on external factors (meteorology and nutrient supply). The model describes the turnover of organic material and nutrients, both in the pelagic (water column) and the benthic phase (seabed or sediment). The pelagic phase includes phytoplankton and nutrients, and the benthic department covers sediment pools of nutrients and the exchange of nutrients between the sediment and water phase. Furthermore, the benthic part of the model describes the biomass and growth of benthic vegetation at the sea bed. The mechanisms behind the biogeochemical model and the ECO Lab templates used are described in the technical report DHI (2019c).

4 Model Set-up

The biogeochemical model for Ringkøbing Fjord builds on top of the hydrodynamic model (HD) and an integrated transport model (AD). The set-up and calibration/validation of the physical Ringkøbing Fjord model (HD and AD) are documented in technical notes (DHI 2019d).

For the present project, the model is set up for the period 2002-2016, which means that all model input data need to cover this period.

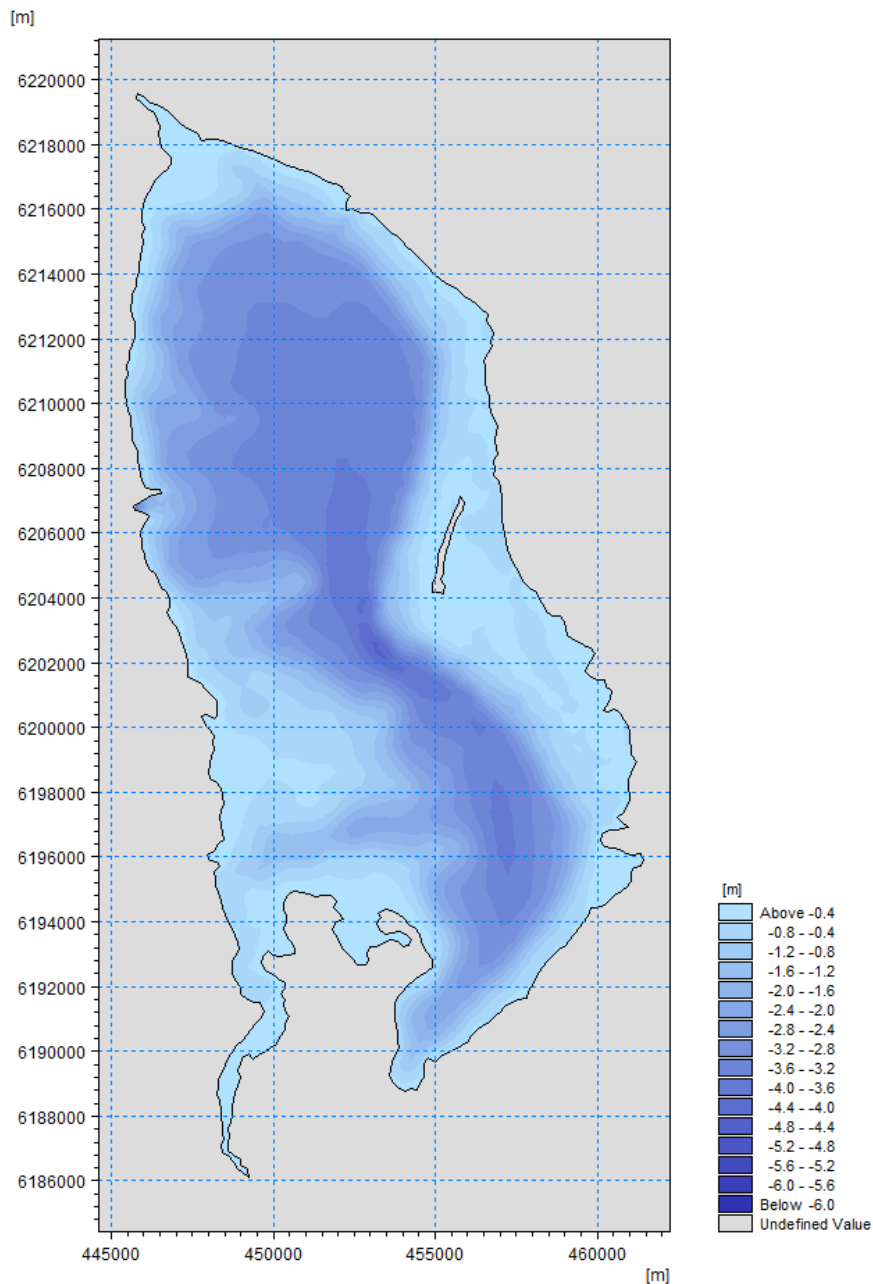


Figure 4-1 Model bathymetry of the Ringkøbing Fjord model. Water depths refer to MSL. The model has no open boundary. The sluice at Hvide Sande is implemented as a source/sink.

4.1 Model Domain

The model domain is determined in accordance with the area of interest of the modelling study. Also, considerations of the area of influence, being the surrounding areas that affect the area of interest, and suitable open boundary locations, affect the choice of the model domain.

The model mesh is the representation of the model domain. More specifically, the model mesh defines the model area, the location of the open boundaries, the land-water boundaries, the horizontal and vertical model resolution (discretization), and the water depths (bathymetry) of the model. The bathymetry of the Ringkøbing Fjord model is shown in Figure 4-1, whereas Figure 4-2 shows the resolution of the horizontal mesh. The vertical mesh in the Ringkøbing Fjord model consists of 15 sigma-layers, everywhere with refinements towards the water surface and the fjord bed. Further documentation on model mesh and horizontal/vertical resolution of the Ringkøbing Fjord HD model can be found in DHI (2019d).

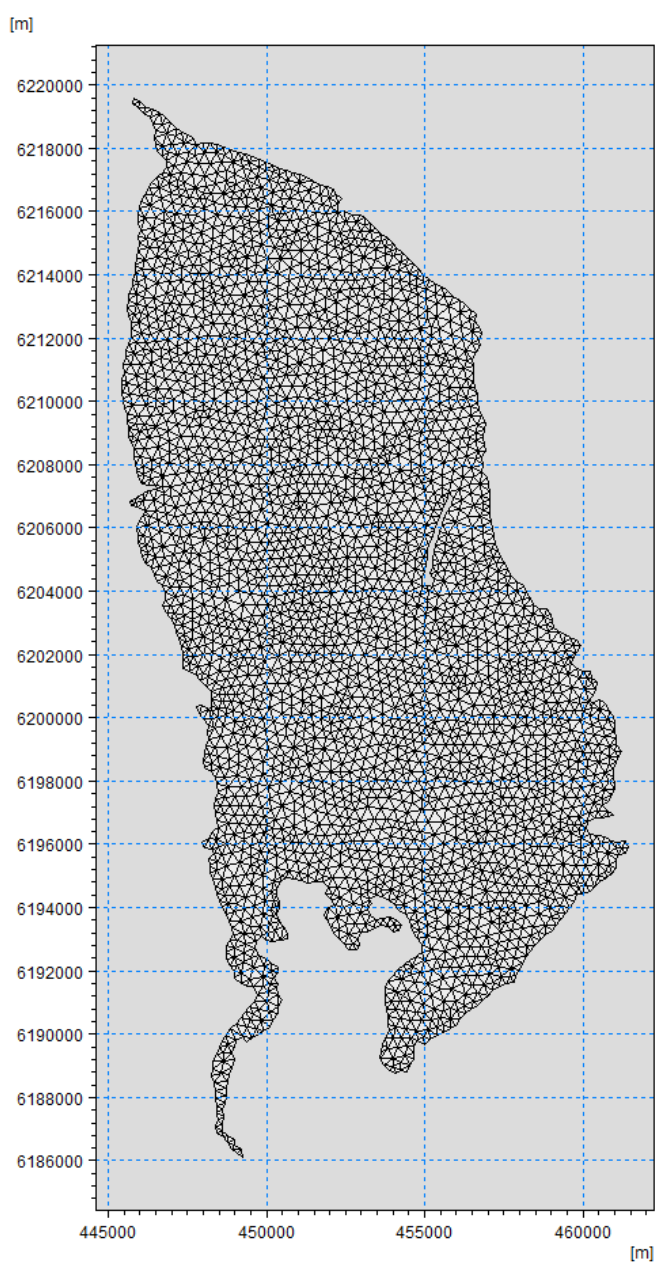


Figure 4-2 Resolution of the horizontal model mesh of the Ringkøbing Fjord model.

4.2 Open Boundary Conditions

The Ringkøbing Fjord model has no open boundaries. The water exchange between the fjord and the sea is controlled through a sluice located at Hvide Sande in the central-western part of the fjord. In this model, the sea-fjord water exchange was modelled using point source/sink for in- and outflow. Documentation on boundary conditions for the biogeochemical model development is given in DHI (2020).

4.3 Forcings

Data on solar radiation are calculated from clearness percentages and applied as a temporally varying forcing.

Area-distributed atmospheric deposition of nitrogen (N) is provided by AU, Department of Environmental Science, and aligned with HELCOM depositions (see DHI 2020).

To estimate suspended sediment concentrations, a dynamic bottom shear stress information is needed. Wave parameters from a Spectral Wave model are included as model forcing, including significant wave height, wave period and mean wave direction, together with current conditions from the hydrodynamic model results.

Documentation on model forcing is given in DHI (2020).

4.4 Sources

The Ringkøbing Fjord model includes sources with land-based nutrient loadings. In Figure 4-3, the location of the sources is shown. Freshwater run-off from land is included in the hydrodynamic module.

The model sources are specified as time series with daily loadings of inorganic and organic nutrients, including also total nitrogen (TN) and total phosphorus (TP). The land-based nutrient loadings are based on data from DCE/AU, Department of Bioscience on a 4th order water body level.

More details are included in DHI (2020).

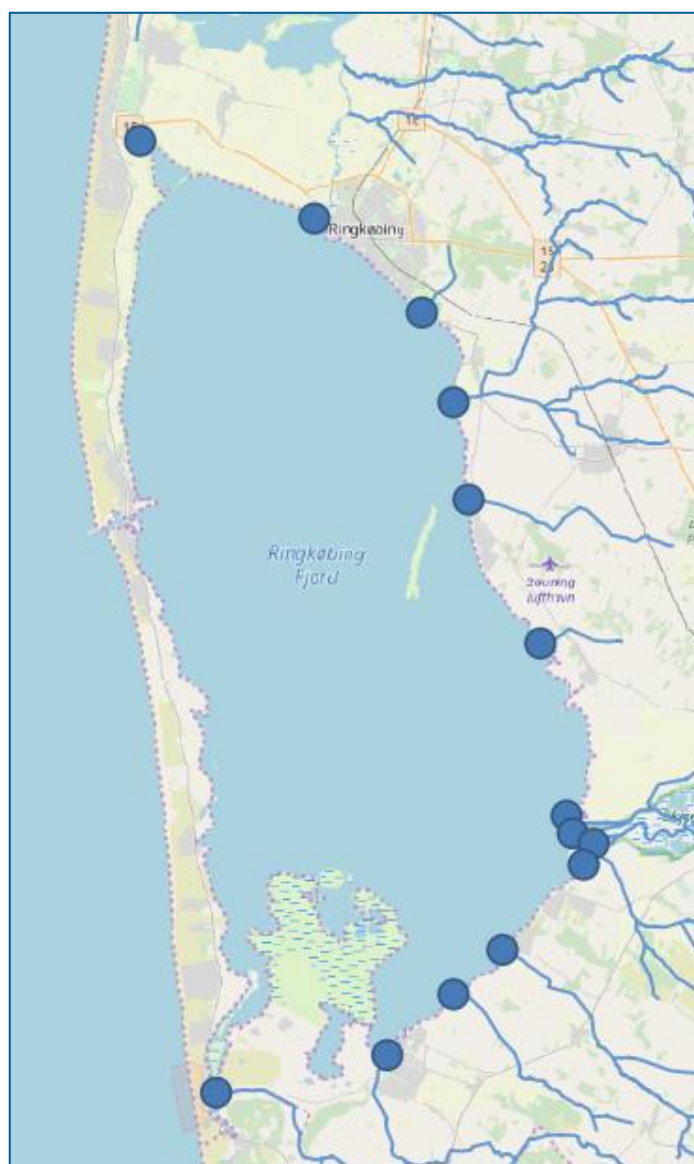


Figure 4-3 Location of sources in the Ringkøbing Fjord model. The sources positions represent the main rivers, but loadings are scaled to include all local run-off and point sources from land to the fjord.

4.5 Initial Conditions

To properly initiate a model simulation, the model requires initial conditions for the various state variables. Initial values in the pelagic phase applied in the Ringkøbing Fjord model were estimated based on measurements within the Ringkøbing Fjord area. The available measurements from around 2002 were applied as uniform values in the entire model domain, and the model was spun-up by four times run for the year 2002 before being used for calibration/validation.

Initial fields of seabed substrates are based on mud-data from EMODnet (2016). Initial values of benthic vegetation (e.g. eelgrass) were estimated by running a MIKE ECO Lab model with defined initial biomass for the entire model domain for a three-year simulation period.

In DHI (2020) further details on initial model values are given.

5 Model Calibration and Validation

After set-up of the model, calibration and validation of the model are undertaken. The model **calibration** is the process of adjusting model process settings and model constants within the literature range to obtain satisfactory agreement between observations and model results in the local modelling domain. In practice, the model set-up and the model calibration are often performed iteratively, since a good comparison between observations and model results requires a well-proportioned model domain as well as adequate model forcings.

The model **validation** is the process of comparing observations and model results qualitatively and quantitatively for a different period from the calibration period to demonstrate the suitability of the calibrated model more generally. The qualitative comparison is typically made graphically, and the quantitative comparison is usually made using specific performance (goodness of fit) measures (DHI 2019b; Erichsen & Timmermann 2017). As such, the model validation constitutes the final documentation of the model performance.

The Ringkøbing Fjord model was run for the period 2002-2016, and the entire period is used for a combined calibration and validation effort, due to lack of enough observation data for separate calibration and validation tasks. Consequently, model performance measures are presented for this period. The model results compared with observations of the different biogeochemical parameters are presented for the entire period using a WEB-tool (rbmp2021-2027.dhigroup.com, Google Chrome only).

5.1 Model Calibration Procedure

Calibration of the biogeochemical Ringkøbing Fjord model is achieved by tuning model constants to optimize model results on calibration parameters compared to measured data. The constants adjusted in the calibration procedure are numerous. They include, e.g. phytoplankton growth rates, grazing rates, mortality rates (phytoplankton and zooplankton), light attenuation constants, sedimentation rates, re-suspension rates, mineralization rates (pelagic and sediment), denitrification rates (pelagic and sediment).

The key parameters to optimize in the calibration procedure include dissolved oxygen, chlorophyll-a, light attenuation, inorganic nutrients, total nitrogen and total phosphorus. After each adjustment of calibration constants, the model is run, and time-series are compared to measured data at selected stations. The procedure is iterated until model results and measured data compare in both time and space.

5.2 Presentation of Key Model Results

During the model calibration procedure, an extensive amount of data on state variables and processes is produced. To allow for smooth and homogeneous quality assurance, few standard plots and time series are generated automatically and evaluated during the baseline and scenario execution.

Examples of modelled key validation parameters are presented as 2D fields in Figure 5-1 to Figure 5-4 and illustrate the spatial variation of the validation parameters. In the following, a brief assessment of the spatial distribution of key parameters, within the water bodies covered by the model domain, will be given.

Average concentrations of dissolved oxygen in bottom waters during 2016 range from a minimum of 7.5-8 mg/l in the central part of Ringkøbing Fjord to maximum values between 12 and above 13 mg/l found in coastal water bodies (Figure 5-1).

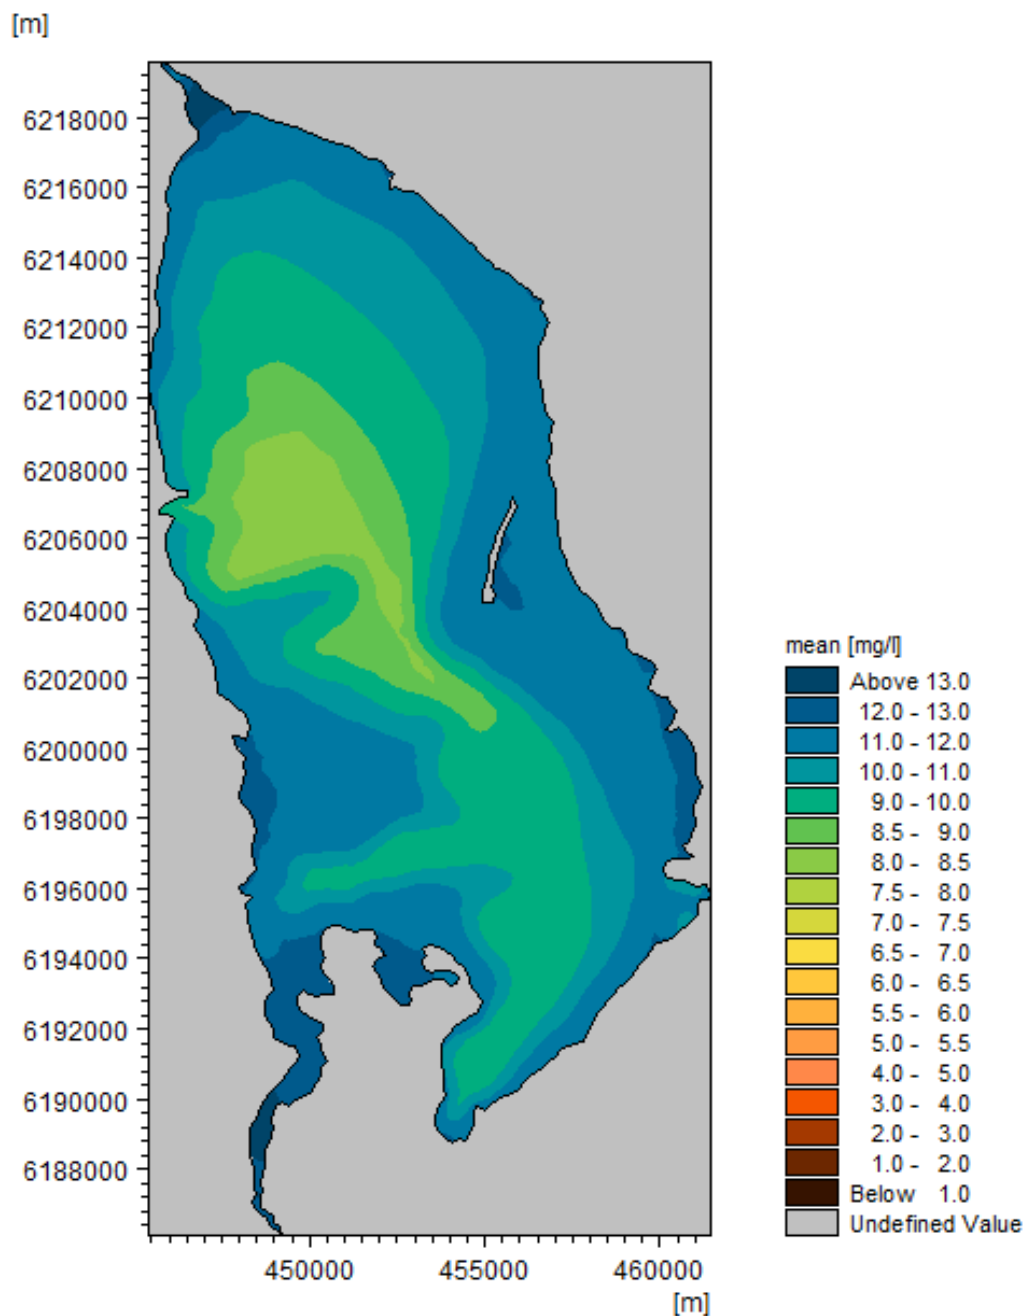


Figure 5-1 Modelled yearly average bottom water concentrations of dissolved oxygen (DO, mg/l) for 2016.

Annual average concentrations of surface chlorophyll-a during 2016 range from 0.0003 mg/l in the coastline of Ringkøbing Fjord and up to 0.008-0.009 mg/l in the central part of Ringkøbing Fjord (Figure 5-2).

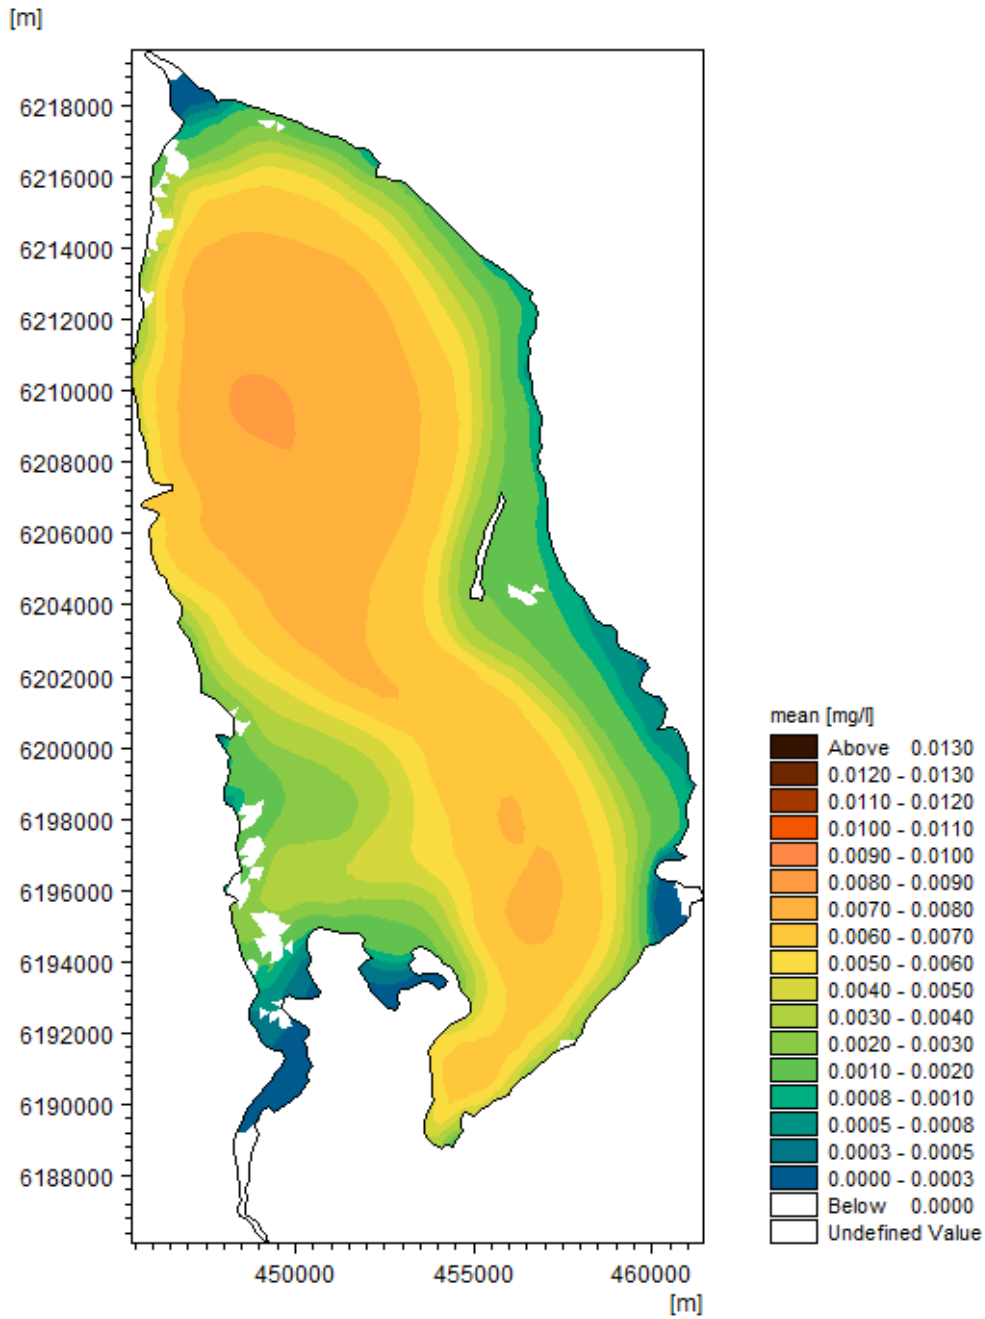


Figure 5-2 Modelled yearly average surface water concentrations of chlorophyll-a (CH, mg/l) for 2016.

Annual average concentrations of surface total nitrogen during 2016 range between 1.2 – 1.8 mg/l (Figure 5-3) and are highest in the southern part of Ringkøbing Fjord with values up to 2.5 mg/l.

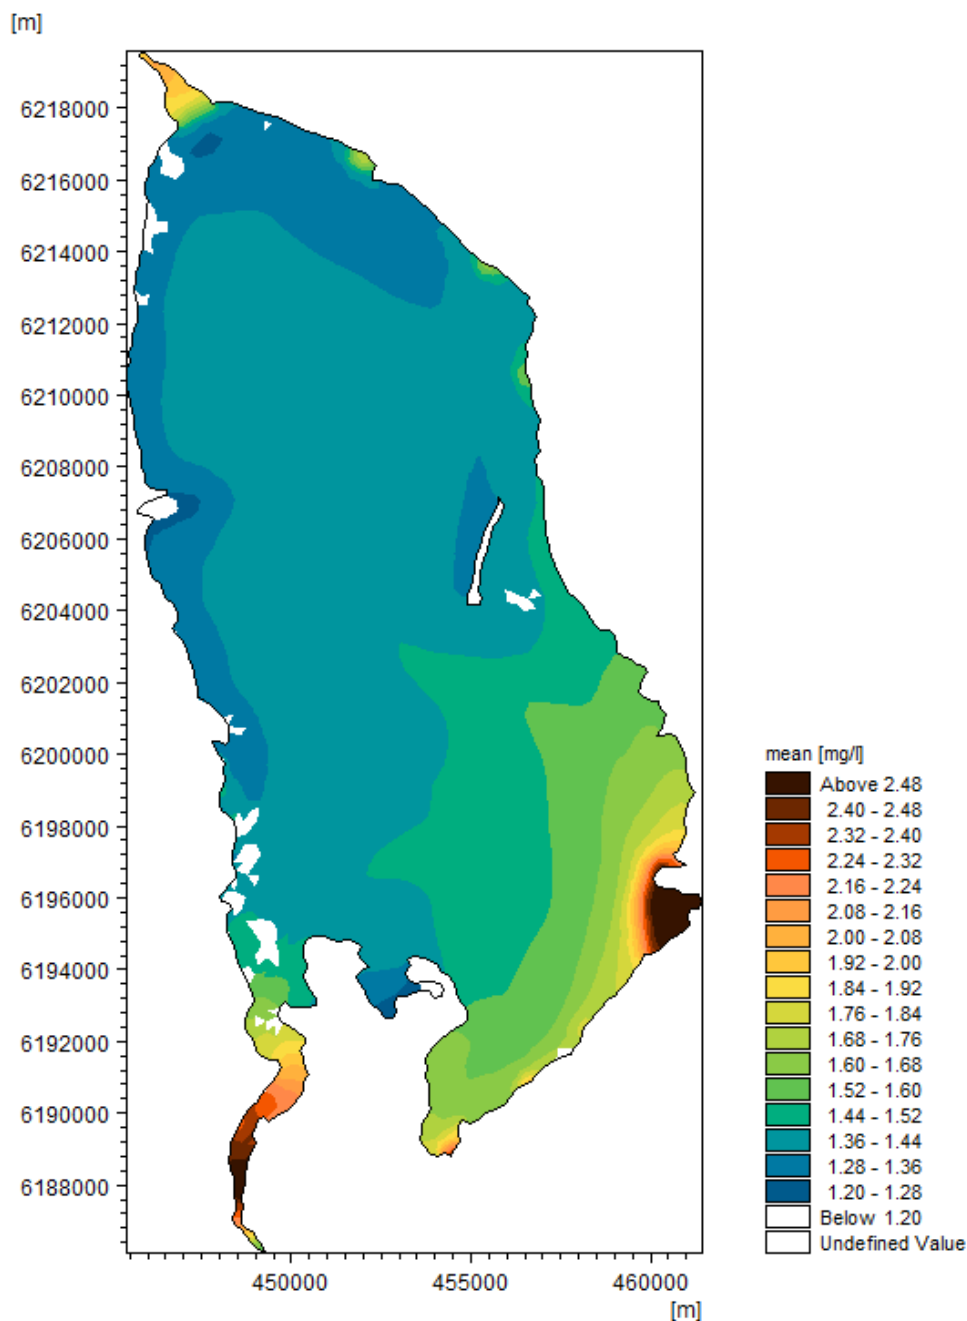


Figure 5-3 Modelled yearly average surface water concentrations of total nitrogen (TN, mg/l) for 2016.

Annual average concentrations of surface total phosphorus during 2016 are between 0.01 mg/l to 0.1 mg/l (Figure 5-4). Highest values are observed in the southern part.

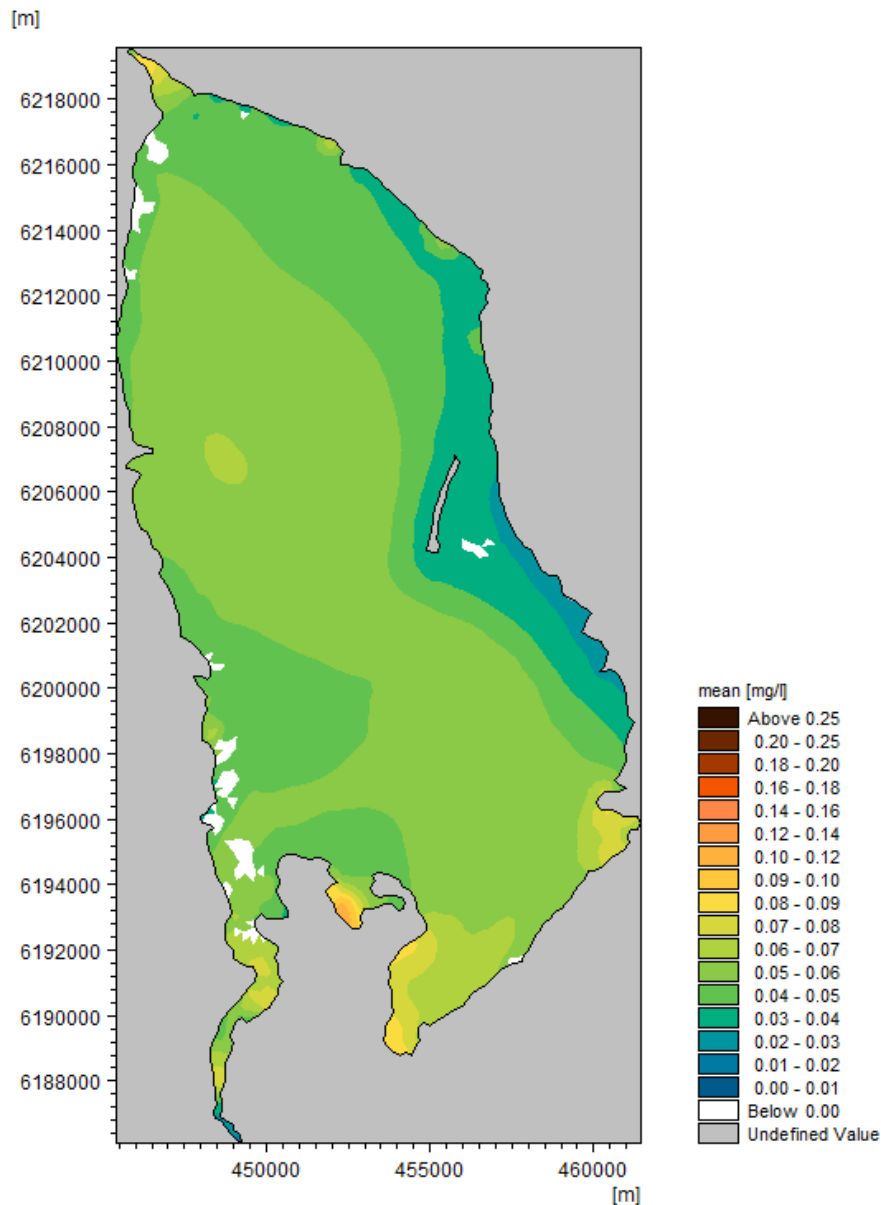


Figure 5-4 Modelled yearly average surface water concentrations of total phosphorus (TP, mg/l) for 2016.

5.3 Model Performance

The Ringkøbing Fjord biogeochemical model was calibrated and validated against measured data (observations) on modelled ecosystem parameters at selected stations within the model domain. Figure 5-1 shows the location of 5 stations within the model domain. Out of the 5 stations, 2 stations (RKB1 and RKB10) had enough measurement data in the period 2002-2016 (at least one year of weekly or bi-weekly data) to be included in the model calibration and validation. The biogeochemical calibration/validation parameters include dissolved oxygen (DO), chlorophyll-a (CH), light attenuation (K_d), dissolved inorganic nitrogen (DIN), dissolved inorganic phosphorus (DIP), total nitrogen (TN) and total phosphorus (TP). Generally, the Ringkøbing

Fjord model compares well to the measurements in terms of model parameters (see Figure 5-3 to Figure 5-9), and the overall performance measure (summarized in Table 5-1 and Table 5-2) confirms a statistically good agreement between measurements and model results.

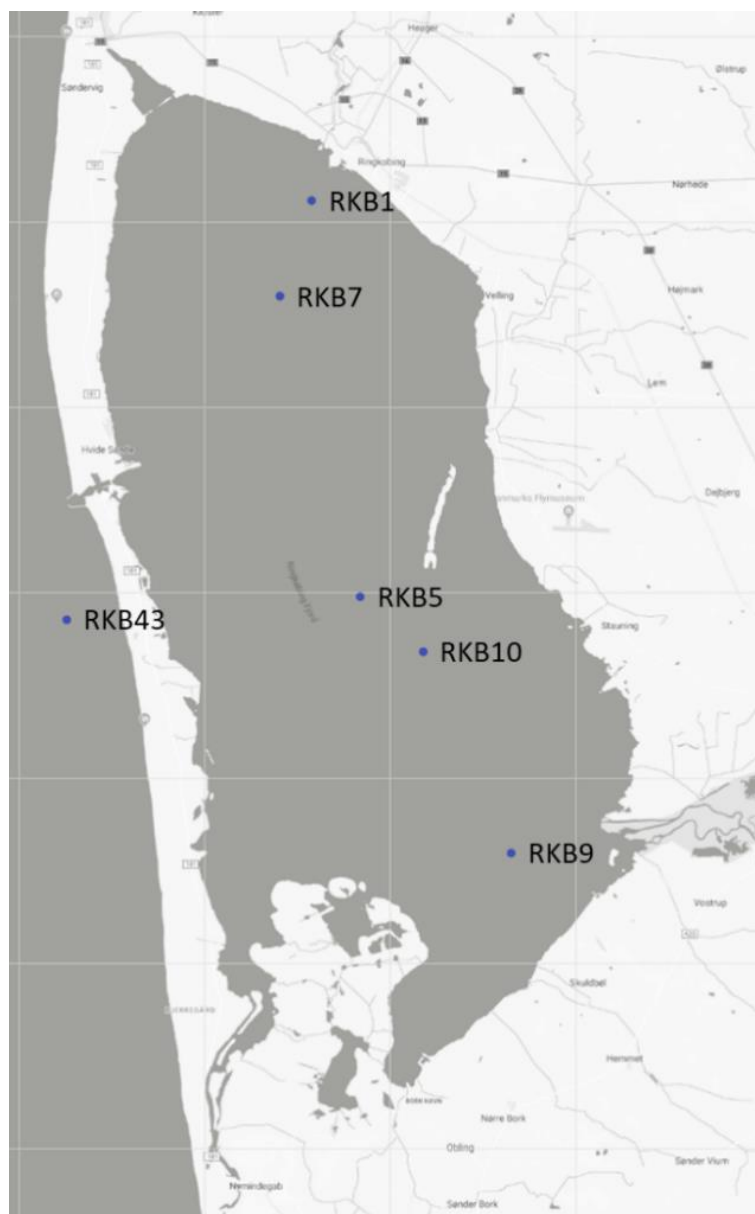


Figure 5-5 Location of station RKB1 and RKB10 used for performance measures in Ringkøbing Fjord.

5.3.1 Calibration/Validation at Station RKB1

In the following, we present an example of the calibration/validation from Ringkøbing Fjord at station RKB1 and refer to rbmp2021-2027.dhigroup.com (Google Chrome only) for more details on the Danish measurement stations. The location of station RKB1 is shown in Figure 5-5.

The comparison at station RKB1 shows a good agreement between the measurements and Ringkøbing Fjord model for 81% of the parameters according to the three performance

measures P-Bias, Spearman Rank Correlation and CF (see Table 5-1 together with DHI (2019b) and Erichsen *et al.* (2017) regarding the applied measures).

In Figure 5-6 measured and modelled concentrations of dissolved oxygen (DO) at station RKB1 in the surface and at bottom waters (here 3 m) are shown. From the figure, it is seen that for DO the variability and seasonality of the surface and bottom waters are well represented by the model. This is in agreement with the statistical performance measures (see Table 5-1), where measured and modelled DO compare 'excellent' (P-Bias) and 'very good' (Spearman Rank Correlation and CF) at station RKB1.

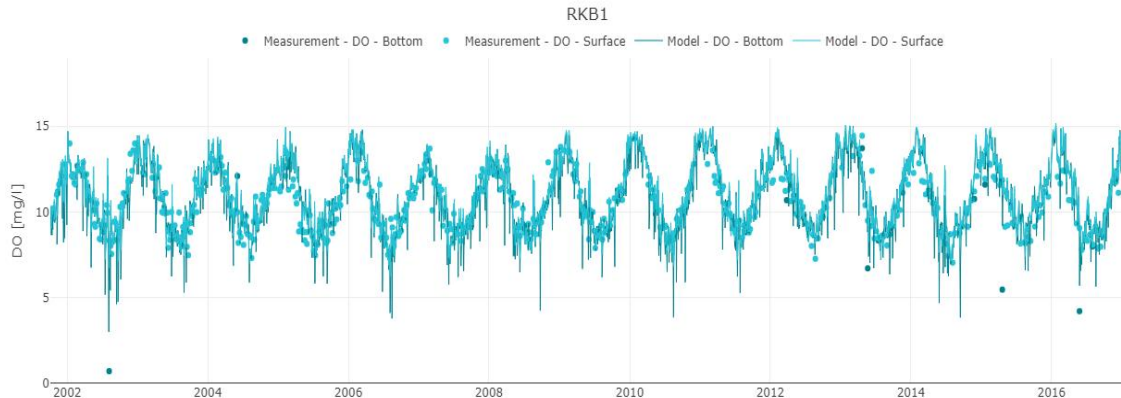


Figure 5-6 Comparison of measured and modelled concentrations of dissolved oxygen (DO, mg/l) at station RKB1 in the surface and bottom (3 m) waters. Dots represent measurements, and the solid line shows modelled data for the entire period.

For chlorophyll-a (CH), the model tends to underestimate winter concentrations and overestimate summer concentrations (see Figure 5-7). From the statistical performance measures, CH compares on average 'good' (P-Bias and CF) and 'poor' based on Spearman Rank Correlation (see Table 5-1).

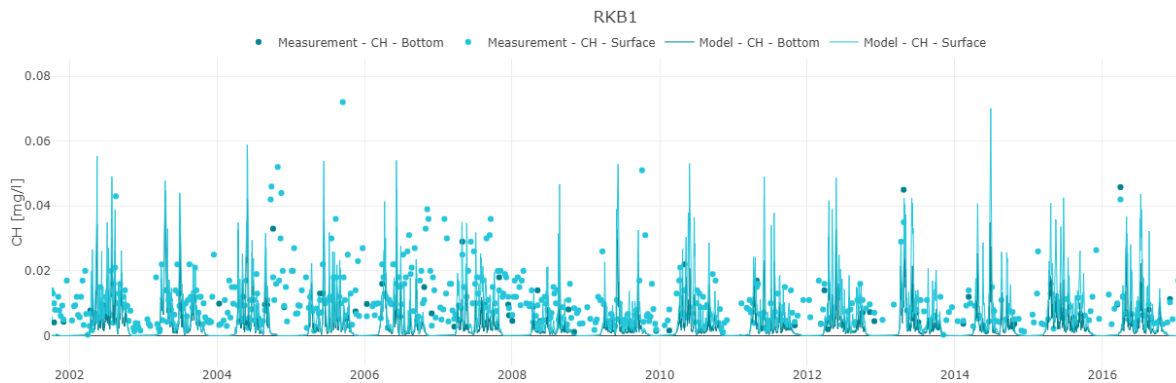


Figure 5-7 Comparison of measured and modelled concentrations of chlorophyll-a (CH, µg/l) at station RKB1 in surface and bottom (3 m) waters. Dots represent measurements, and solid lines show modelled data for the entire period.

For the light attenuation coefficient (K_d), the seasonality is in general well represented by the Ringkøbing Fjord model (see Figure 5-8), with a tendency to underestimate winter values. From the statistical performance measures, annual K_d compares 'very good' according to CF, 'good' based on to Spearman Rank Correlation, and 'poor' according to P-Bias (Table 5-1).

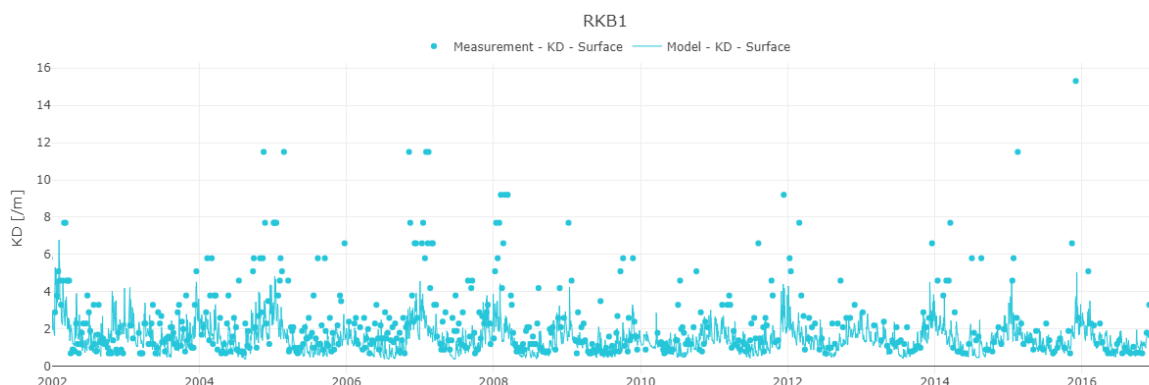


Figure 5-8 Comparison of measured and modelled light attenuation coefficient (K_d , m^{-1}) at station RKB1 in the surface waters. Dots represent measurements, and the solid line shows modelled data for the entire period.

For dissolved inorganic nitrogen (DIN), the structure in the seasonality is well represented by the Ringkøbing Fjord model (see Figure 5-9), with a tendency to overestimate the summer concentrations. From the statistical performance measures, annual DIN compares 'very good' according to Spearman Rank Correlation and CF and 'poor' based on P-Bias (Table 5-1).

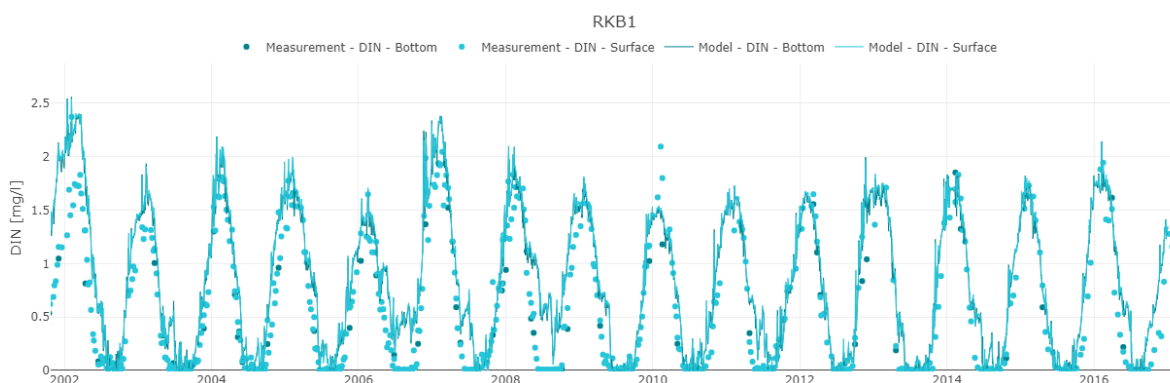


Figure 5-9 Measured and modelled concentrations of dissolved inorganic nitrogen (DIN, mg/l) at station RKB1 in the surface and bottom (3 m) waters. Dots represent measurements, and solid lines show modelled data for the entire period.

When comparing measured and modelled concentrations of DIP (see Figure 5-10), we see relatively similar winter concentrations and a definite drop in spring. During the summer, the model shows a somehow more dynamic pattern than observed in the measurements. Hence, the overall patterns are well represented by the model, which is further supported by the statistical performance measures, where the model performance for all DIP is 'good' according to all quality measures (P-Bias, Spearman Rank Correlation and CF).

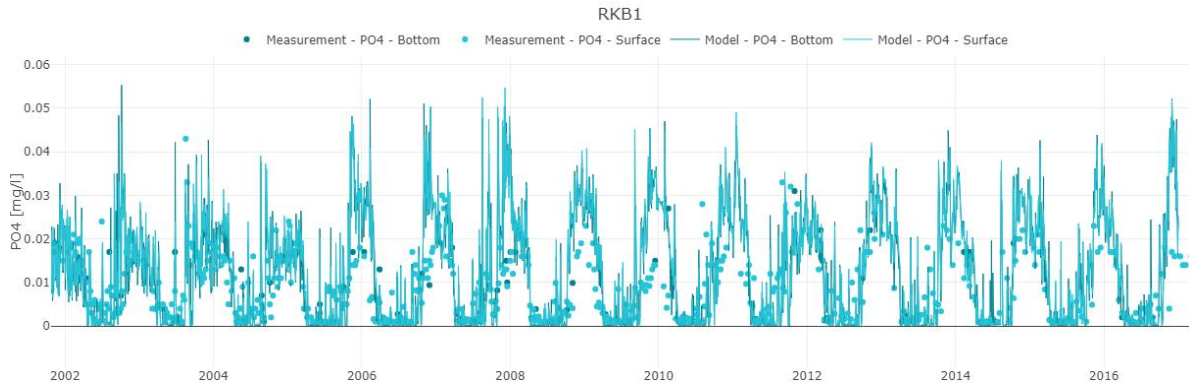


Figure 5-10 Measured and modelled concentrations of dissolved inorganic phosphorus (DIP, mg/l) at station RKB10 in the surface and bottom (3 m) waters. Dots represent measurements, and solid lines show modelled data for the entire period.

In Figure 5-11 comparisons of measured and modelled total nitrogen (TN) at station RKB1 in surface water and bottom (3 m) water are shown. For TN, the model tends to predict more accurately for surface water compared to bottom water values. The statistical performance measures support this (see Table 5-1), where measured and modelled TN compare ‘very good’ (Spearman Rank and CF) and ‘poor’ (P-Bias) at station RKB1.

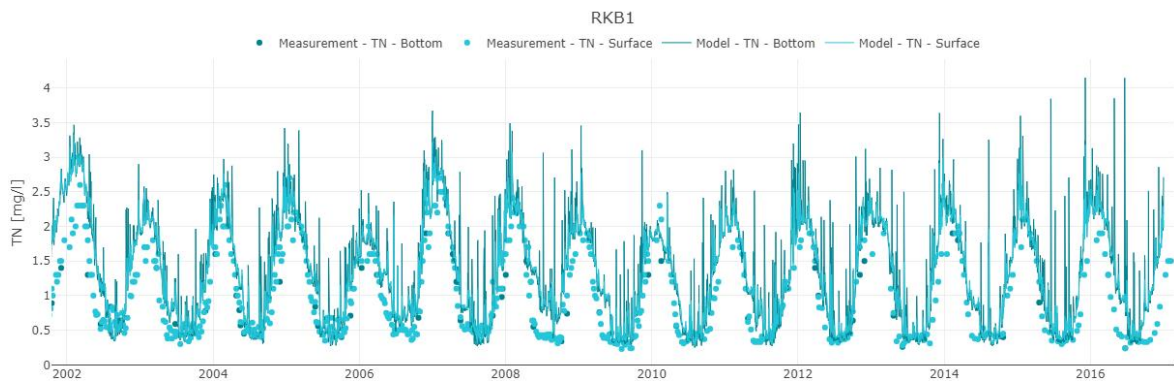


Figure 5-11 Comparison of measured and modelled concentrations of total nitrogen (TN, mg/l) at station RKB1 in surface and bottom (3 m) waters. Scatter data represent measurements, and solid lines show modelled data for the entire period.

The seasonal dynamics in TP predicted by the model are shown in Figure 5-12 and compare well with measured data on TP. The model performance for TP at station RKB1 is 'very good' (P-Bias and CF) and 'good' (Spearman Rank Correlation).

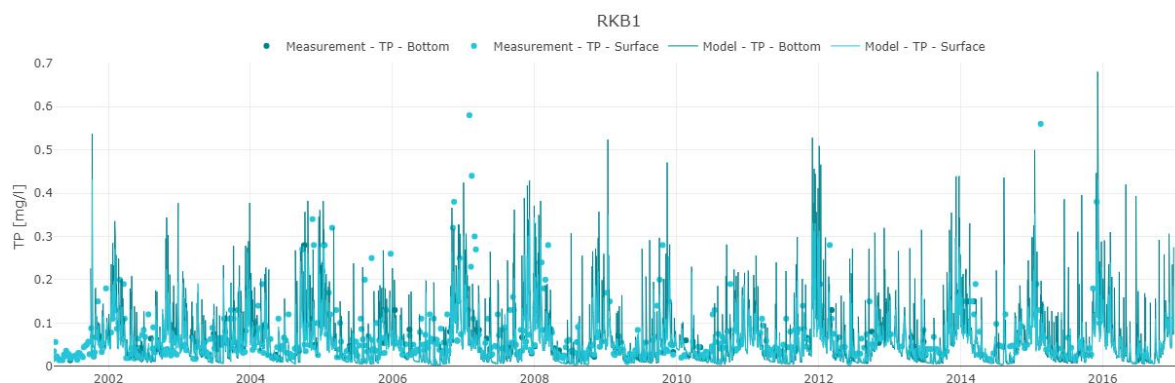


Figure 5-12 Comparison of measured and modelled concentrations of total P (TP, mg/l) at station RKB1 in surface and bottom (3 m) waters. Scatter data represent measurements, and solid lines show modelled data for the entire period.

5.3.2 General Calibration/Validation

For the calibration/validation period (2002-2016) two out of the five stations had a sufficient amount of measurement data (at least one year of weekly or bi-weekly data) to be included in the model performance (stations RKB1 and RKB10). Figure 5-5 shows the two locations with measurements of ecosystem parameters (chlorophyll-a (CH), light attenuation (K_d), dissolved oxygen (DO), dissolved inorganic phosphorus (DIP), dissolved inorganic nitrogen (DIN), total nitrogen (TN), and total phosphorus (TP)) during the period 2002-2016. Time series data are presented using the WEB-tool (<http://rbmp2021-2027.dhigroup.com>).

In Table 5-1 and Table 5-2, the model performance is evaluated based on three performance measures: P-Bias, Spearman Rank Correlation and CF.

In the tables, colour codes are included to highlight the overall model performance as 'excellent', 'very good', 'good' or 'poor'. For the biogeochemical model covering Ringkøbing Fjord, we aim at 'excellent', 'very good' or 'good' model performance for 75% of the data sets on measures. All model performances (both annual and summer/winter) evaluated against the three different quality measures at two stations were found to be 'excellent', 'very good' or 'good' for 76% of the measurements (see Figure 5-13 and Table 5-1 and Table 5-2). The annual model performance was found to be 'excellent', 'very good' or 'good' for 79% of the measurements.




Figure 5-13 Bar chart illustrating all model performances evaluated against three different quality measures and all parameters. The vertical line indicates the aim of 75% being 'excellent', 'very good' or 'good'.

According to P-Bias (Table 5-1 and Table 5-2), the model meets 'excellent', 'very good' or 'good' in 64% of all measurements (including specific winter and summer evaluations) and 59% when evaluating the annual measurements only. A 'good' model performance measured by P-Bias for summer and winter measurements indicates that the predicted absolute values of summer

chlorophyll-a, summer light attenuation, and winter inorganic nutrient concentrations correspond well to the observed values. In general, the P-Bias obtains larger negative and positive values for most of the parameters, indicating that the model underestimates and overestimates parameters. On average, P-Bias evaluates the model performance for dissolved oxygen to be 'excellent'; for CH, K_d and TP model performance is on average 'good'; The model performance for DIN, DIP and TN evaluated from P-Bias is on average 'poor'.

As for the quality measure Spearman Rank Correlation (Table 5-1 and Table 5-2), the model performance meets 'excellent', 'very good' or 'good' in 64% of all measurements (including specific winter and summer evaluations) and 86% in the annual measurements. A good annual correlation obtained from the Spearman Rank Correlation measure indicates a good seasonal correlation, where the predicted dynamics correspond well with the observed seasonal variability. On average, the Spearman Rank Correlation evaluates the model performance for dissolved oxygen, DIN and TN to be 'very good'. For K_d , DIP and TP, the average model performance is 'good'. The average model performance for all CH evaluated from Spearman Rank Correlation is on average 'poor'.

According to the performance measure CF (Table 5-1 and Table 5-2), the model meets 'excellent', 'very good' or 'good' in 100% of all measurements and 100% of annual measurements at the two stations (Table 5-1 and Table 5-2). On average, the Cost Function evaluates DO, K_d , DIN, TN and TP to be 'very good' on average for all measures and 'good' for CH and DIP.

Table 5-1 Review of model performance at station RKB1 based on measured and modelled data for the validation period 2002-2016. Blue colour indicates an 'excellent' model; dark green indicates a 'very good' model; light green indicates a 'good' model, and yellow indicates a 'poor' model.

Parameter	P-Bias (%)	Spearman Rank Correlation	Cost Function (CF)	Number of observations
TN annual	39.1	0.87	0.63	609
TP annual	-29.5	0.47	0.59	581
DIP annual	41.5	0.69	0.93	608
DIP winter	56.7	-0.11	2.20	104
DIN annual ^a	51.8	0.88	0.51	608
DIN winter ^a	22.8	0.71	0.96	104
CH annual	-32.9	0.03	1.12	618
CH summer ^b	9.5	-0.05	1.15	281
DO annual	3.3	0.87	0.44	544
K_d annual	-41.8	0.52	0.55	548
K_d summer ^c	36.1	0.28	0.66	355

^a Jan, Feb, Dec

^b May-Sep

^c Mar-Sep

Table 5-2 Review of model performance at station RKB10 based on measured and modelled data for the validation period 2002-2016. Blue colour indicates an 'excellent' model; dark green indicates a 'very good' model; light green indicates a 'good' model, and yellow indicates a 'poor' model.

Parameter	P-Bias (%)	Spearman Rank Correlation	Cost Function (CF)	Number of observations
TN annual	42.2	0.85	0.71	441
TP annual	-12.7	0.45	0.80	443
DIP annual	38.5	0.70	0.89	442
DIP winter	35.8	-0.04	1.64	70
DIN annual ^a	62.3	0.86	0.61	441
DIN winter ^a	29.6	0.72	1.08	70
CH annual	-41.7	0.20	1.28	443
CH summer ^b	-23.0	-0.05	1.32	218
DO annual	2.5	0.86	0.41	355
K _d annual	-43.2	0.59	0.58	119
K _d summer ^c	38.8	0.28	0.75	81

^a Jan, Feb, Dec

^b May-Sep

^c Mar-Sep

6 Conclusion

This technical note shows that the model performance for the biogeochemical model covering Ringkøbing Fjord meets the performance measure 'excellent', 'very good' or 'good' in 79% of the annual measurements and 76% in both yearly and summer/winter measurements evaluated against three quality measures. The ambition is to meet the above criteria in 75% of all measurements for all parameters and all stations (lumped). Hence, we conclude that the biogeochemical model covering Ringkøbing Fjord is well suited for modelling scenarios as part of the overall development of mechanistic models towards the RBMP 2021-2027.

7 References

- DHI (2019a). MIKE 21 & MIKE 3 Flow Model FM. Hydrodynamic and Transport Module. Scientific Documentation (http://manuals.mikepoweredbydhi.help/2019/Coast_and_Sea/MIKE_321_FM_Scientific_Doc.pdf)
- DHI (2019b). Development of Mechanistic Models. Assessment of Model Performance. DHI technical report (project no. 11822245)
- DHI (2019c). Development of Mechanistic Models. Short Technical Description of the Biogeochemical Models Applied for the Mechanistic Model Development. DHI technical report (project no. 11822245)
- DHI (2019d). Development of Mechanistic Models. Mechanistic Model for Ringkøbing Fjord. Hydrodynamic model documentation. DHI report (project no. 11822245)
- DHI (2020). Development of Mechanistic Models. Short Technical Description of the Biogeochemical Models Input Data. DHI technical report (project no. 11822245)
- EMODnet Bathymetry Consortium (2016). EMODnet Digital Bathymetry (DTM) (<http://doi.org/10.12770/c7b53704-999d-4721-b1a3-04ec60c87238>, link working 15-11-2018).
- Erichsen AC, Møhlenberg F, Timmermann K, Christensen JPA & Göke C (2019). Gennemgang af grundlaget for afgrænsning, karakterisering og typeinddeling af kystvande i vandområdeplanerne. Rapport. <https://mst.dk/media/187927/afgraensning-karakterisering-typologi.pdf>
- Erichsen AC (Ed.), Timmermann K (Ed.), Christensen JPA, Kaas H, Markager S, Møhlenberg F (2017). Development of models and methods to support the Danish River Basin Management Plans. Scientific documentation. Aarhus University, Department of Bioscience and DHI, 191 pp.
- Herman P, Newton A, Schernewski G, Gustafsson B & Malve O (2017). International Evaluation of the Danish Marine Models. Miljøstyrelsen (https://mfvm.dk/fileadmin/user_upload/MFVM/Nyheder/Bilag_1_Evalueringsrapport_om_de_da_nske_kvaelstofmodeller__10._oktober_2017-2.pdf)